



Reactor® E-8p

Portable Plural-Component Sprayer
for No-Heat Polyurethane Foams




PROVEN QUALITY. LEADING TECHNOLOGY.


Build Your Business by Re-insulating Existing Homes

Here's your opportunity

Homeowners are looking for ways to cut energy costs. Proper sealing and insulating is a long-term cost-effective way to make their homes more energy-efficient. With over 86 million existing homes in North America that require better insulation¹, this is a great opportunity for you to build your business.

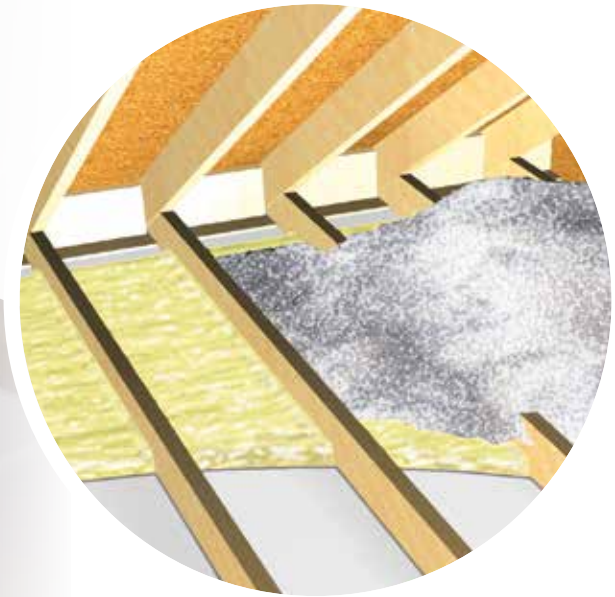

Use the Reactor E-8p in attics to create an air barrier under blown-in insulation (above), or to seal and insulate rim joists (below).

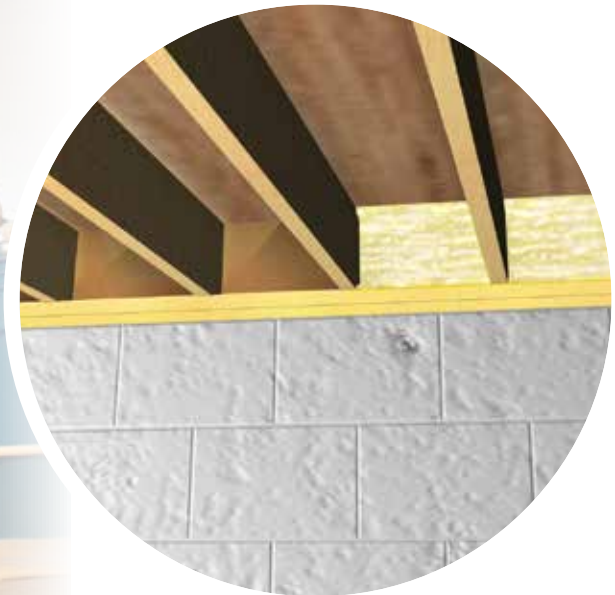

A 2005 National Institute of Standards and Technology study² indicates that an air barrier system could reduce air leakage by up to 85%, and realize a 40% savings in natural gas, and a 25% savings in electricity.

The Reactor E-8p is the solution

The Reactor E-8p Portable Plural-Component Sprayer is among the first portable, professional foam insulation systems that produces foam for air-sealing existing homes. In fact, it's the first system that's designed specifically for new no-heat polyurethane foam formulations. It produces a proven air-seal solution that's in demand by homeowners who want energy-efficient homes.

Expand your business

Become more competitive in today's market with equipment designed for the remodeling or small foam job. Whether you're expanding your existing insulation application opportunities or just starting your business, the Reactor E-8p provides a quick return on investment. As a touch-up system, the Reactor E-8p frees up larger rigs for medium and large jobs while enabling you to finish the job affordably.

Portable, lightweight and easy to move

Haul it in your van, pickup or car. Take it anywhere – through narrow doorways or halls, even up narrow stairways of older homes. The Reactor E-8p's compact design easily fits in tight areas so you can spray foam with ease. Since no heaters are required, the Reactor E-8p is small, lightweight and compact.

Designed for existing home environments

The compact design is unobtrusive. Simply plug it into a standard residential outlet. Material is drawn from handy no-spill five-gallon pails. No feed pumps needed.

Applications

- Rim joists in existing homes
- Attics in existing homes – *as an air barrier under blown-in insulation*
- Alternative to froth kits
- Backup system for spray rig owners
- Touch-up projects in tight areas
- HVAC spray sealing of approved duct work
- Roofing applications – *patching, applying select roofing adhesives*



Best Choice for Portability and High-Quality Foam

Built-in Suction Lines

No need for feed pumps



Pressure Gauges

Easy to read gauges ensure you're spraying on-ratio.



Holster for Suction Lines

Keeps tubes in place during transport; prevents drips.



Desiccant Air Dryer

Allows air to be drawn into pail; protects material from contamination.

Telescoping Handle

Easy handling from your vehicle to the home

Lightweight and Portable

Easy to maneuver up and down stairs, wherever the job goes – only 95 lb (43 kg)

Alarm / Status Indicator

Shuts down unit if off-ratio conditions exist – assures good quality foam at the job site



Pressure Balance Valves

Quick and easy balancing of system pressures enables correct start-up

Threaded Bucket Spout Connection

Keeps your connection secure and prevents spills

Electric Motor

Proven motor performance and reduced operating costs; plugs into a standard residential outlet

Easy Controls

Intuitive start/stop with single knob operation

Spray Guns

Uses standard Graco Fusion or P2 Guns; provides consistent spray patterns

Non-heated Hose

Easy to maneuver – 70% lighter than standard Reactor heated hose



Carrying Handle/Hose Wrap
Easy to transport, convenient hose storage.



Reactor E-8p: An Economical Alternative to Froth Kits

A quick return on your investment

Many small projects that are ordinarily completed with froth kits can now be accomplished more economically with the Reactor E-8p and no-heat polyurethane foams. In fact, froth kits can cost up to three times the cost of five-gallon pails of no-heat foam polyurethane materials.

ANNUAL MATERIAL SAVINGS WITH E-8p

	SMALL FROTH KIT	LARGE FROTH KIT	NO-HEAT FOAM 5-GAL PAIL SET	FORMULA
PACKAGE SIZE	39 lb	118 lb	80 lb	
AVERAGE COST PER KIT	\$374	\$828	\$320	A
TYPICAL YIELD (in board feet)*	170	510	450	B
COST PER BOARD FOOT	\$2.20	\$1.62	\$0.71	$C = A / B$
AVERAGE SIZE JOB (in board feet)	850	850	850	D
FOAM COSTS OF AVERAGE SIZE JOB	\$1,870	\$1,380	\$604	$E = C \times D$
ESTIMATED NUMBER OF JOBS ANNUALLY	50	50	50	F
ANNUAL MATERIAL COST	\$93,500	\$69,000	\$30,200	$G = E \times F$
ANNUAL MATERIAL SAVINGS WITH E-8p	\$63,143	\$38,643		$H = G - \text{ANNUAL MAT'L COST OF NO-HEAT FOAM}$

* Per The Dow Chemical Company for Froth Kits: The theoretical yield has become an industry standard for identifying certain sizes of two-component kits. Theoretical yield calculations are done in perfect laboratory conditions, without taking into account the loss of blowing agent or the variation in application methods and types. This chart is an example only and should be reviewed for each application. Dollar savings are not guaranteed. Actual results may vary.



Ready - Easy to transport to the job site.



Set - Get ready to spray in a matter of minutes.



Spray - Ideal for attics and rim joists.

Technical Specifications and Ordering Information

Technical Specifications

Max fluid working pressure	2000 psi (140 bar, 14 MPa)	Fluid outlets	Component A (ISO):-5 JIC male Component B (RES):-6 JIC male
Electrical requirements	Model 259082: 120 Vac, dedicated 15 A-circuit, 1 phase, 50/60 Hz	Fluid circulation return	Component A (ISO):-5 JIC male Component B (RES):-6 JIC male
Max output	12 lb/min (5.4 kg/min) at 340 cycles/min	Hose markings	A side: Red; B side: Blue
Max chamber size00 (orifice size 0.029)	Wetted parts	Aluminum, stainless steel, carbon steel, brass, carbide, chrome, chemically resistant o-rings, PTFE, ultra-high molecular weight polyethylene
Output per cycle (A and B).....	.00352 gal (0.0133 liter)	Dimensions (Bare sprayer)	35 L x 24 H x 15 W in (89 x 61 x 38 cm)
Sound power (per ISO 9614-2)	94.4 dB(A) at 2000 psi (140 bar, 14 MPa) 0.5 gpm (1.9 lpm)	Weight (Bare sprayer, no hose, no gun).....	95 lb (43 kg)
Sound pressure (1 m from equipment)	84.5 dB(A) at 2000 psi (140 bar, 14 MPa) 0.5 gpm (1.9 lpm)	Operation manual	3A1602A

For best results, use specially formulated no-heat polyurethane foam and follow chemical manufacturer's application recommendations.

Ordering Information

Sprayers — Packages include gun and 35 ft (10.6 m) of non-heated hose

259082	Bare proportioner, 240V, 15 amp cord	259083	Bare proportioner, 240V, 10 amp cord
AP9082	Proportioner package with Fusion AP Gun (246100) and non-heated hose (24M653)	AP9083	Proportioner package with Fusion AP Gun (246100) and non-heated hose (24M653)
CS9082	Proportioner package with Fusion CS Gun (CS00RD) and non-heated hose (24M653)	CS9083	Proportioner package with Fusion CS Gun (CS00RD) and non-heated hose (24M653)
P29082	Proportioner package with P2 Gun (GCP2R0) and non-heated hose (24M653)	P29083	Proportioner package with P2 Gun (GCP2R0) and non-heated hose (24M653)

Accessories

119974	Dryer, desiccant	24J766	Adapter, spout, pour, assembly B
249855	Repair kit, displacement pump; includes seals, balls, bearings, intake valve seat	16H615	Tube, recirculation
246010	Suction hose, pump to 5 gal pail	249633	Hose bundle, 35 ft (10.6 m), non-insulated
24J155	Adapter, spout, pour, assembly A		

Guns — Refer to brochure 300615 for complete spray gun listings, plus wide and flat chamber sizes

246099	Fusion AP: AR2020 (000) mix chamber (0.020 orifice size)	GCP2R0	P2: GC2500 mix chamber with GC2510 tip (0.029 orifice size)
246100	Fusion AP: AR2929 (00) mix chamber (0.029 orifice size)	CS20RD	Fusion CS: RD2020 (000) round mix chamber (0.020 orifice size)
GCP2RA	P2: GC250A mix chamber with GC251A tip (0.020 orifice size)	CS00RD	Fusion CS: RD0000 (00) round mix chamber (0.029 orifice size)



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 443, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877-84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Customer Service
800-328-0211
Fax 877-340-6427