



REACTOR™ E-10

Compact and Portable Plural-Component Proportioners



GRACO | GUSMER

PROVEN QUALITY. LEADING TECHNOLOGY.

Small ready-to-use systems with big results!

REACTOR E-10 PROPORTIONERS



Get in and get smaller jobs done fast without sacrificing performance. Graco's portable E-10 sprayers are ideal for plural-component spray, joint-fill jobs and touch-ups. With smart controls that are easy to setup and simple to operate, the E-10 is a natural complement to any proportioning equipment line-up.

- | Foam Insulation | Coatings |
|------------------------|--|
| • Rim Joists | • Small industrial jobs |
| • Roof patching | • Concrete joint filling and flooring applications |
| • Prep work | • Small tank spraying using cold spray polyurea |
| • Window repair | • Industrial maintenance |
| • High rise apartments | |

REACTOR™ E-10

PLURAL COMPONENT PROPORTIONER

Makes even small jobs profitable

POWER-PACKED WITH FEATURES

- 1 ELECTRIC POWER**
Low draw, plugs into standard outlet. Operates almost anywhere!
- 2 EASY CONTROLS**
Intuitive start, stop and digital temperature display with single knob operation
- 3 PRESSURE BALANCE VALVES**
Quick and easy balancing of system pressures
- 4 BALANCED PROPORTIONING**
Eliminates pressure fluctuations to give you a consistent spray pattern
- 5 EASY-TO-SERVICE FLUID SECTION**
Reduces maintenance and increases productivity
- 6 ELECTRIC MOTOR**
Improves performance and reduces operating costs
- 7 SELF-CONTAINED TRANSLUCENT MATERIAL TANKS**
See that you are spraying on-ratio
- 8 2-WHEEL CART**
Easy to maneuver up and down stairs, wherever the job goes
- 9 HEATERS & HOSE**
Up to 2000 watts to pre-heat circulating material



Model 249802



Advanced Features in a Flexible Package

- ▶ Small size is ideal for on-site portability and hard-to-reach areas
- ▶ One-person operation saves time and money
- ▶ Use as an add-on to your existing spray business
- ▶ Versatile – switch from cold spray to hot spray to foam
- ▶ Saves 30% on material costs compared to disposable foam systems

Selecting the Right Reactor E-10 System

STEP ONE

A Choose your Reactor E-10 Unit based on your material requirements.

REACTOR E-10 HEATED UNIT

Package units include:

35 feet of insulated hose bundled and a Fusion AP gun with an AW2222 mix chamber

Package	Bare	
249800	249570	120 Vac, with 2 separate, dedicated 15 A circuits, 1 phase, 50/60 Hz
249802	249571	240 Vac, with 2 separate, dedicated 10 A circuits, 1 phase, 50/60 Hz*
249804	249572	240 Vac, with a single, dedicated 20 A circuit, 1 phase, 50/60 Hz

*Export unit

REACTOR E-10 UNHEATED UNIT

Package units include:

35 feet of insulated hose bundled and a 2K Ultra-Lite™ gun with a joint fill and cold spray kit

Package	Bare	
249806	249576	120 Vac, with a single, dedicated 15 A circuit, 1 phase, 50/60 Hz
249808	249577	240 Vac, with a single, dedicated 10 A circuit, 1 phase, 50/60 Hz

STEP TWO

Determine your power source.

- A WALL**
OR Use on-site power
- B GENERATOR**
Use a generator for even greater flexibility.
Wattage requirements:
• Machine only: 5000 watts (heated unit)
• Electric air compressor
- Check the manufacturing power requirements and add the air compressor to the Reactor E-10's wattage requirements for your total wattage
- C AIR COMPRESSOR**
Required for proper gun operation and activation

STEP THREE

Moving your material. Do you need an agitator or a feed pump?

- A 55 GALLON DRUMS**
Easily transfer material into 5 gallon pails or to the Reactor E-10 machine
- B TRANSFER PAILS**
Transport your material from a bulk supply to the Reactor E-10
- C AGITATOR**
Agitate your resin for consistent coating
- D ADDITIONAL HOSE SECTIONS**
Additional hose is available in 35 feet increments for a maximum of 105 feet
- E WASTE PAILS**
Waste pails are used for startup and shutdown



2A Readily Available Power Source

Determine what power is available in your location




Single dedicated 20amp, 240volt circuit

2 separate dedicated 15amp, 120volt circuits or 10amp, 240volt circuits

Setting new standards in flexible proportioning

Portability, flexibility, precision and ease-of-use ... the Reactor E-10 meets a wide range of flow and performance requirements. Flow rates are based on a material viscosity of 60 cps.

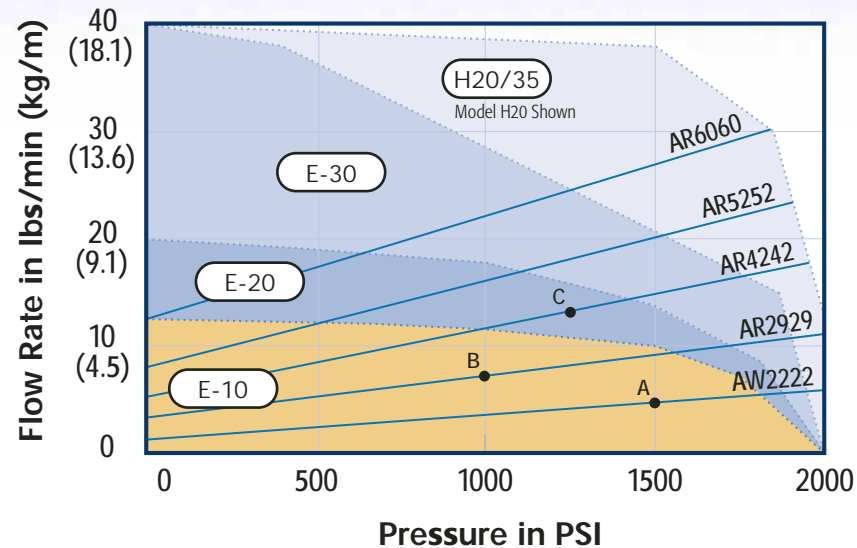

HOW TO USE THIS CHART

- Select spray pressure
- Select mix chamber
- Choose Reactor model

Note: Darker shading includes Reactor models shown in lighter shaded areas.

EXAMPLES

- A** Mix chamber: AR2222
 Pressure: 1500 psi
 Flow rate: 5 lbs/min
 Reactor E-10, E-20 and E-30
- B** Mix chamber: AR2929
 Pressure: 1000 psi
 Flow rate: 8 lbs/min
 Reactor E-10, E-20 and E-30
- C** Mix chamber: AR4242
 Pressure: 1250 psi
 Flow rate: 12 lbs/min
 Reactor E-20 and E-30

Graco|Gusmer high performance proportioners



	MP unit	FF1600	E-10	E-20/E-30	E-XP1/E-XP2	H20/35 PRO
PRESSURE psi (bar, MPa)	1600 (110, 11.0)	1600 (110, 11.0)	2000 (138, 13.8)	2000 (138, 13.8)	2500/3500 (172, 17.2/241, 24.1)	2000/3500 (138, 13.8/241, 24.1)
FLOW RATE lb/min (kg/min)	16 (7.3)	16 (7.3)	12 (5.4)	18/34 (8.2/15.4)	10/20 (4.5/9.1)	38/24 (17.2/11.0)
HEATER WATTAGE	N/A	5 Kw	1700w heated 2000w	6 Kw/10.2 Kw	10.2 Kw/15.3 Kw	12 Kw/18 Kw
AMP DRAW Single Phase	-	40 amps	See Tech Specs	48/78 amps	69/100 amps	100/74 amps (3 phase)
WEIGHT lbs (kg)	80/100 w/tanks (36/45 w/tanks)	140 (64)	160 (72)	340/400 (154/181)	342/438 (155/199)	735 (333)

Technical Specifications

Reactor E-10

- Maximum fluid working pressure2000 psi (140 bar, 14 MPa)
- Maximum fluid temperature150° (68°)
- Maximum output12 lb/min (5.4 kg/min) at 340 cycles/min
- Output per cycle (A and B)0.00352 gal (.0133 l)
- Heater power
 - 120V models850 W each; 1700 W total
 - 240V models1000 W each; 2000 W total
- Sound power, per ISO 9614-286 dB(A) at 2000 psi (140 bar, 14 MPa), 0.4 gpm (1.5 lpm)
- Tank capacity7 gal. (26.5 liters) each (nominal)
- Fluid outlets and returns*A" 1/4 I.D. #5 JIC
 *B" 1/4 I.D. #6 JIC
- Fluid component markings
 - A SideRed
 - B SideBlue
- Weight
 - Heated units160 lb (72 kg)
 - Unheated units150 lb (68 kg)
- Dimensions44 in. H x 26.5 in W x 30 in. D (112 cm H x 67 cm W x 76 cm D)
- Wetted partsAluminum, stainless steel, carbon steel, brass, carbide, chrome, chemically resistant o-rings, PTFE, ultra-high molecular weight polyethylene

Instruction manuals

- Displacement pump parts311076
- Fluid heater311210
- Fusion air purge spray gun309550
- Fusion mechanical purge spray gun309856
- 2K Ultra-Lite parts309000
- 2K Ultra-Lite cold spray and joint fill kits311230

Air consumption

- Unheated joint fill units2 cfm @ 100 psi (70 bar, 7 MPa)
- Unheated cold spray units16 cfm @ 100 psi (70 bar, 7 MPa)
- Heated units with Fusion gun2.5 cfm @ 100 psi (70 bar, 7 MPa)

Power requirements*

- | Package | Bare | |
|---------|--------|------------|
| 249800 | 249570 | 3500 watts |
| 249802 | 249571 | 3800 watts |
| 249804 | 249572 | 3800 watts |
| 249806 | 249576 | 1800 watts |
| 249808 | 249577 | 1800 watts |

- *When sizing the generator, make sure to consider all power requirements for the job
- Hose length
- Maximum105 feet (33m)
 - Minimum35 feet (10m)

Ordering Information

E-10 Systems

- 249800 120V, heated, 2 cord, 35 ft 5-hose bundle, AP gun
- 249802 240V, heated, 2 cord, 35 ft 5-hose bundle, AP gun
- 249804 240V, heated, 1 cord, 35 ft 5-hose bundle, AP gun
- 249806 120V, ambient, 35 ft 3-hose bundle, 2K Ultra-Lite gun, complete kit
- 249808 240V, ambient, 35 ft 3-hose bundle, 2K Ultra-Lite gun, complete kit

E-10 Bare Proportioners

- 249570 120V heated, (2) 15A cords, 1,700 W
- 249571 240V heated, (2) 10A cords, 2,000 W
- 249572 240V heated, (1) 20A cord, 2,000 W
- 249576 120V Unheated, (1) 15A cord
- 249577 240V Unheated, (1) 10A cord

Accessories

Applicator Assembly

- 249810 Fusion AP gun, AW2222 (with 4-hose manifold)
- 249815 Fusion MP gun, XF2323/FTM438 (with 4-hose manifold)
- 249591 2K Ultra-Lite complete valve kit (with cold spray and joint fill)
- 249634 2K Ultra-Lite valve cold spray kit (complete, ready to spray)
- 249635 2K Ultra-Lite valve joint fill kit (complete, ready to dispense)

Hoses

- 249499 Five hose insulated (heated packages) with air, 35 ft (10.6 m) sections, 1/4 in (6 mm)
- 249633 Three hose (unheated packages), with air, 35 ft (10.6 m) sections, 1/4 in (6 mm)

Repair Kits

- 249853 Air filter/water separator kit
- 249855 Pump repair kit
- 249835 2K restrictor outlet kit (front end for 2K bare valve)
- 120042 1/4 I.D. x 24 spray disposable mixer (bag of 50) for both cold spray and joint fill units
- 120043 Spray mixer adapter kit, round pattern (bag of 5)
- 120044 Cap, air spray, for mixer adapter (bag of 5)
- 249765 Restrictor kit, 2K Ultra-Lite valve (mix of restrictors) for balancing pressures
- 249508 Hose, A ISO, 35 ft., coupled
- 249509 Hose, B resin, 35 ft., coupled
- 15G342 Hose, air, 35 ft., coupled
- 119974 E-10 desiccant dryer

ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology which set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO HEADQUARTERS

AMERICAS

MINNESOTA
Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

MAILING ADDRESS
P.O. Box 1441
Minneapolis, MN 55440-1441
Tel 612 623-6000
Fax 612 623-6777

EUROPE

BELGIUM
European Headquarters
Graco N.V.
Industrieterrein - Oude Bunders
Slakweidestraat 31
3630 Maasmechelen, Belgium
Tel 32 89 770 700
Fax 32 89 770 777

ASIA PACIFIC

JAPAN
Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel 81 45 593 7300
Fax 81 45 593 7301

CHINA
Graco Hong Kong Ltd.
Representative Office
Room 118 1st Floor
No. 2 Xin Yuan Building
No. 509 Cao Bao Road
Shanghai, P.R.China 200233
Tel 86 21 649 50088
Fax 86 21 649 50077

KOREA


Graco Korea Inc.
Choheung Bank Building,
4th Floor #1599,
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Gyunggi-Do,
Korea 431-060
Tel 82-31-476-9400
Fax 82-31-476-9801

Call today for product information or to request a demonstration.

1.877.84GRACO (1-877-844-7226) or visit us at www.graco.com/coatingsandfoam

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco Inc. is registered to I.S. EN ISO 9001



Sales/Distribution/Service North America

Industrial Customer Service
800-328-0211
FAX 877-340-6427
Industrial Product Information/Demonstration
1-877-84GRACO (1-877-844-7226)

GRACO INC.
P.O. Box 1441
Minneapolis, MN 55440-1441

